

Product Specifications

NAME: Low-voltage Touch Panel Dimmer (America standard)

MODEL: TM06U




Summarization

Touch panel dimmer is a new high-end dimmer which newly developed by our company. It adopts glass panel design, is beautiful and fashionable in appearance. It adopts high precision capacitance touch control chip, increases the touch sensitivity, reduces trigger which caused by mistake. It is used for controlling a variety of lamp whose source of light is LED. For instance, point source of light, flexible light strip, panel lights etc., it has many advantages such as convenient to connect, easy to use and others.

Technical Parameters

- Working temperature: -20-60 °C
- Supply voltage: DC12~24V
- Output voltage: DC12~24V
- Output: 1 channel
- Connection mode: common anode
- External dimension: L74 X W120 X H41.8mm
- Packing size: L150 X W100 X H57 mm
- Net weight: 150g
- Gross weight: 207g
- Static power consumption: <1W
- Output current: <8A
- Output power: 12V<96W, 24V<192W

External Dimension

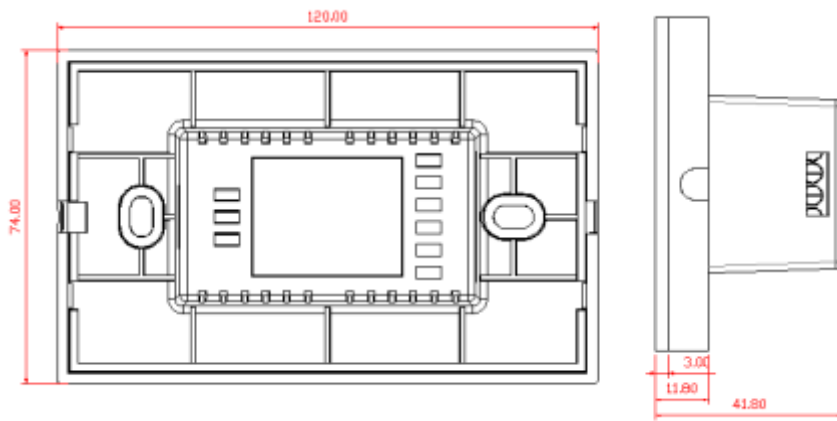

Unit: mm

Interface Specifications



3 and 4: power input, input voltage range: 12-24V, 3 for positive, 4 for negative.

1 and 2: power output, output voltage is 12-24V, Max output current is 8A, 2 for positive, 1 for negative.

Instruction:



: adjust brightness 0-100 quickly.



: turn on/off dimmer at any state; when in an open state, long press the button more than 3 seconds to open or close the output of the buzzer.




: reduce static brightness, 255 grades.



: increase static brightness, 255 grades.

Typical Application

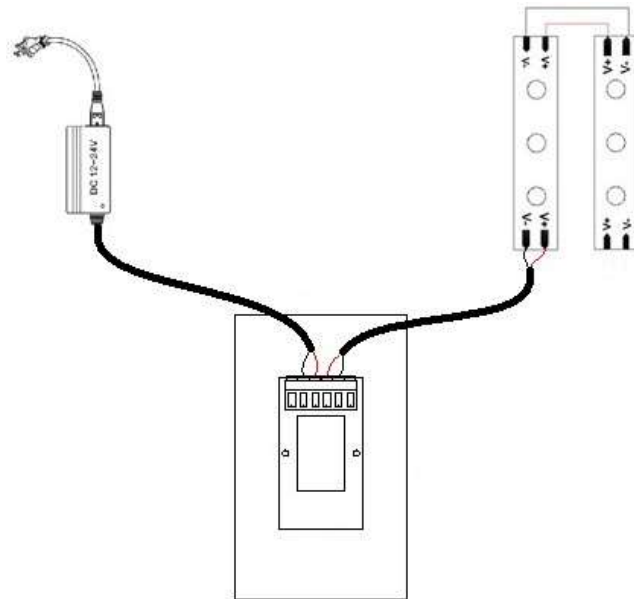

Installation Method

1. Wiring

Connect wiring according to typical application. Refer to typical application.



2. Open the panel

Gently pry gaps in touch panel with a screwdriver, and then you can slowly remove the panel, as shown below;




3. Install switch base

Step 1: Remove the ribbon cable. Press the place which marked by red circle and pull out to remove the ribbon cable, push in to press it hard. Like the figure below:



Step 2: Put touch panel controller in the cassette on the wall, screw it on the wall, then install the switch base on the wall. See pictures below:

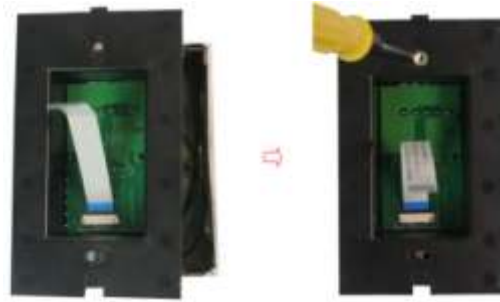

4. Cover touch panel

Look at the direction of touch panel, install the ribbon cable, and then cover the touch panel.



Remarks:

1. Connect the load wire at first, following by the power wire; **Please ensure short circuit can not occur between connecting wire before you turn on the power;**
2. The supply voltage of controller ranges in DC12V~DC24V, it may burn out the controller once exceed the voltage ranges.